



MANUAL

Safetybag 119608-00

General

Safetybag for Time-Log

The Safetybag protects the Time-Log while used in wet environment.

It has three barriers which have to be well sealed for efficient protection: one plastic zip-sealer and two hook-and-loop fasteners. A plastic window makes Time-Log manageable also while it is in the safetybag.

The Safetybag has so-called float-pillow which keeps Time-Log on the water surface.

Hook makes it easy to fasten Time-Log to the belt.


The Safetybag is made of tarpulin/ polyester, all seams are welded. Material is tough and durable but sharp objects can damage it.

External dimensions: High 180 mm, width 110 mm. Weight 45 g.



How to use safetybag:

Step 1: Open the safetybag and place the Time-Log into it thus you can both see and press buttons of the Time-Log through plastic window. Extract the air from the safetybag and squeeze together zip-sealer thus it joins and clicks.

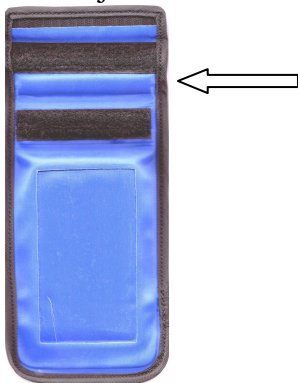

Step 2: Fold down first round inwards and press together first hook-and-loop fastener.



Step 3: Fold down second round inwards and press together second hook-and-loop fastener.



WESTERSTRAND URFABRIK AB

Box 133
545 23 TÖREBODA

Tel. 0506 48000
Fax. 0506 48051

Internet:
E-mail:

www.westerstrand.se
info@westerstrand.se