


Westerstrand Time System



Analogue Clocks type Quartz - Exclusive design

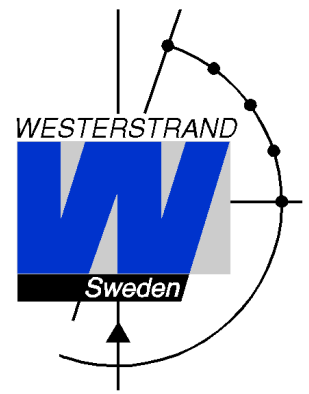

Westerstrand analogue Quartz clocks are operated by a 1,5V battery (battery not included) and have a red seconds hand.

General

- Sizes Ø230, 300 and 400mm
- Housing in ABS-plastic, white (NCS 0502-B) or graphite grey (RAL 7016)
- White dial with black numerals 1-12 (A-dial), black hour marks (H-dial) or office version
- Black hour- and minute hand and red seconds hand (same seconds hand for sizes Ø300 and 400mm)
- Flat front cover of glass
- Single sided for surface wall mounting or double sided with mounting bracket for either wall mounting or ceiling/standing installation
- Double sided clocks consist of two single sided clocks and one bracket

Options

- Front cover in polycarbonate
- Protection cupola in acrylic or protection cover in polycarbonate
- Power reserve
- Back cover in white painted aluminium for single sided mounting with bracket

Technical Specifications

Quartz Clocks HH:MM:SS				
Article No	Size	Colour	Dial	Weight
Q163100-00	Ø230	Grey	A	0,8 Kgs
Q163141-00	Ø230	White	A	0,8 Kgs
Q163104-00	Ø230	Grey	H	0,8 Kgs
Q163143-00	Ø230	White	H	0,8 Kgs
Q163070-00	Ø230	Grey	Office	0,8 Kgs
Q163071-00	Ø230	White	Office	0,8 Kgs
Q163112-00	Ø300	Grey	A	1,1 Kgs
Q163145-00	Ø300	White	A	1,1 Kgs
Q163116-00	Ø300	Grey	H	1,1 Kgs
Q163147-00	Ø300	White	H	1,1 Kgs
Q163072-00	Ø300	Grey	Office	1,1 Kgs
Q163073-00	Ø300	White	Office	1,1 Kgs
Q163124-00	Ø400	Grey	A	1,8 Kgs
Q163149-00	Ø400	White	A	1,8 Kgs
Q163128-00	Ø400	Grey	H	1,8 Kgs
Q163151-00	Ø400	White	H	1,8 Kgs
Q163074-00	Ø400	Grey	Office	1,8 Kgs
Q163075-00	Ø400	White	Office	1,8 Kgs
Rest house clock with large digits and thick hands				
Q4041120-00	Ø400	Grey	A-SP	1,8 Kgs
Power reserve for Quartz Battery clocks				
B42336-00		230VAC		
		2 R14 Alcaline		5 years

Bracket / Back cover			
Article No	Type	Version	Weight
B161375-20	Bracket	Ø230	0,3 Kgs
B161372-20	Bracket	Ø300	0,4 Kgs
B161373-20	Bracket	Ø400	0,5 Kgs
BC161595-00	Back cover	-	0,1 Kgs


Bracket arm in aluminium profile, back cover in white painted aluminium

Technical Data

Operating Temp: 0 to +40°C
 Relative Humidity: max 95%
 IP rating: IP20
 Reading distance:
 Ø230: 10m
 Ø300: 20m
 Ø400: 25m

We reserve the right to make changes at any time.

Dimensions

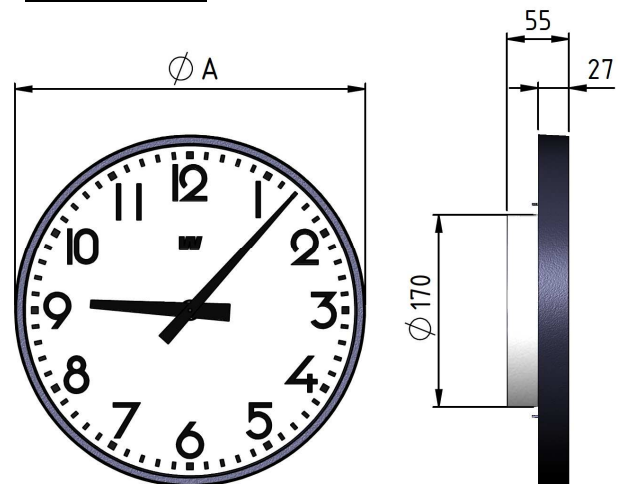

Slave Clocks	A	B	C
Ø230	236	120	356
Ø300	309	135	444
Ø400	410	145	555

All measurements in mm.

